

I.I. Alnaib, A.N. Alsammak

Optimization of fractional PI controller parameters for enhanced induction motor speed control via indirect field-oriented control

Introduction. Induction Motors (IM) possess advantages such as stability, reliability, and ease of control, making them suitable for many purposes; the literature elucidates control methodologies for IM drives, primarily focusing on scalar and vector control techniques; the conventional method utilized in manufacturing is scalar control, which unfortunately demonstrates optimal performance solely in steady-state conditions. The absence of significant instantaneous torque control restricts flux and dissociated torque, resulting in subpar dynamic responsiveness. Indirect Field Oriented Control (IFOC) for IM drives has proven beneficial for various industrial applications, particularly electric vehicle propulsion. The primary advantages of this approach include the decoupling of torque and flux characteristics and its straightforward implementation. **The novelty** of the work consists of a proposal for a driving cycle model for testing the control system of electric vehicles in Mosul City (Iraq), and using a Complex Fractional Order Proportional Integral (CFOPi) controller to control IMs via IFOC strategies, the Artificial Bee Colony (ABC) algorithm was applied, which is considered to be highly efficient in finding the values of controllers. **Purpose.** Improvement IFOC techniques for the regulation of IM speed. **Methods.** Using the ABC algorithm in tuning the two unique CFOPi controller, and a Real Fractional Order Proportional Integral (RFOPi) controller, to regulate the speed of a three-phase IM via IFOC techniques. **Results.** The CFOPi controller outperforms the RFOPi controller in obtaining the best performance in controlling the IM. **Practical value.** The CFOPi controller demonstrates superiority over the RFOPi controller, as evidenced by the lower integral time absolute error in motor speed tracking during the driving cycle 2.1004 for the CFOPi controller compared to 2.1538 for the RFOPi controller. References 27, tables 5, figures 4.

Key words: complex fractional order proportional integral controller, real fractional order proportional integral controller, artificial bee colony algorithm, indirect field oriented control.

Вступ. Асинхронні двигуни (АД) мають такі переваги, як стабільність, надійність і легкість керування, що робить їх придатними для багатьох цілей; література пояснює методології керування приводами АД, головним чином зосереджуючись на методах скалярного та векторного керування; звичайний метод, який використовується у виробництві, – це скалярне керування, яке, на жаль, демонструє оптимальну продуктивність лише в стаціонарних умовах. Відсутність значного миттєвого контролю крутного моменту обмежує потік і дисоційований крутний момент, що призводить до низької динамічної чутливості. Непряме поле-орієнтоване керування (IFOC) для приводів АД, довело свою користь для різноманітних промислових застосувань, зокрема для двигунів електромобілів. Основні переваги цього підходу включають відокремлення характеристик крутного моменту та потоку та його пряме впровадження. **Новизна** роботи полягає в пропозиції моделі циклу водіння для тестування системи керування електромобілями в місті Мосул (Ірак), і використання контролера комплексного дробового порядку пропорційного інтегралу (CFOPi) для керування АД за допомогою стратегії IFOC, було застосовано алгоритм штучної бджолиної колонії (ABC), який вважається високоефективним у пошуку значень контролерів. **Мета.** Удосконалення методики IFOC для регулювання швидкості АД. **Методи.** Використання алгоритму ABC для налаштування двох унікальних контролерів CFOPi та контролера реального дробового порядку пропорційного інтегралу (RFOPi) для регулювання швидкості трифазного АД за допомогою методів IFOC. **Результати.** Контролер CFOPi перевершує контролер RFOPi в отриманні найкращої продуктивності в управлінні АД. **Практична цінність.** Контролер CFOPi демонструє перевагу над контролером RFOPi, про що свідчить менша абсолютна похибка інтегрального часу у відстеженні швидкості двигуна під час циклу руху 2.1004 для контролера CFOPi порівняно з 2.1538 для контролера RFOPi. Бібл. 27, табл. 5, рис. 4.

Ключові слова: пропорційно-інтегральний контролер комплексного дробового порядку, пропорційно-інтегральний контролер дійсного дробового порядку, алгоритм штучної бджолиної колонії, непряме поле-орієнтоване керування.

Introduction. Induction motors (IM) have advantageous characteristics like robustness, reliability, and ease of control, and are used in many different types of applications [1, 2]. These applications electric and hybrid vehicles, the literature clarified control methodologies for IM drives, predominantly encompassing scalar and vector control approaches [3, 4]. The lack of significant instantaneous torque control inhibits flux and dissociated torque, leading to suboptimal dynamic responsiveness [5]. In contrast, Field Oriented Control (FOC) regulates the frequency, amplitude, and instantaneous location of the flow linkage vectors of current and voltage [6, 7]. Therefore, it is effective for each stability and enhanced dynamic performance [8, 9]. The two fundamental groups of FOC methods are direct and indirect operations, defined by Blaschke in 1972 and Hasse in 1968, respectively [10].

The aim of the paper is using Indirect Field Oriented Control (IFOC) strategies for speed control of IM and decision the mathematical model of the system. Proposal for a driving cycle model for testing the control system of electric vehicles in Mosul City, Iraq. Applying the Artificial Bee Colony (ABC) algorithm to identify optimal certain elements for fractional order PI controllers.

Review of the literature. The authors compared the complex fractional order PI controller against the real fractional order PI controller to control the speed of the

IM via the IFOC technique. The results showed that the Complex Fractional Order Proportional Integral (CFOPi) controller improved the Real Fractional Order Proportional Integral (RFOPi) controller by achieving a minimal error between the reference and actual speeds. Nevertheless, the controller variables were found by using trial and error [11]. The research presented here differentiates between the two different RFOPi speed controllers (FOPI and FO[PI]) of the IM drive. The results show the superiority of the FO[PI] controller compared to the FOPI and integer order PI under identical stability boundary constraints [12]. This study elucidates the use of Particle Swarm Optimization (PSO), Teaching Learning Based Optimization (TLBO) and Jaya optimization algorithms for the calibration of PI and RFOPi controllers employed in the IM driving model with comparison of the results from the aforementioned optimization. This indicates that Jaya yields superior reduction outcomes compared to the other two strategies [13]. An intelligent hybrid control system for scalar IM control use ANFIS optimization [14]. This study confirms the efficacy as well as the upside of a CFOPi model for ascertaining the parameters of a PID controller that manages the common rail tension in the injection system of a compressed fossil fuel engine. Parameters are derived by PSO process that

© I.I. Alnaib, A.N. Alsammak

integrates a cost factor evaluating effectiveness and reliability metrics [15]. A review of previous work in the field indicates that a few researchers have used CFOPI controllers to control IMs via IFOC strategies. Those who have investigated this type of controller utilized the trial and error method to ascertain optimal parameter values.

Materials and methods. The control architecture of IFOC (Fig. 1) is a vector control method widely accepted in high performance drive vehicles. The theory fundamentally relies on decoupling flux and torque by regulating the stator current component [16, 17]. The components of the control circuit in Fig. 1 are next [2, 18]: R_r is the rotor resistance, L_r is the rotor self-inductance, T_m is the electromagnetic torque, p is the number of pole pairs, L_m is the magnetizing inductance, ψ_{dr} is the rotor flux, ω is the angular frequency, I_{abc} is the IM current, i_d , i_q are the rotating currents in $d-q$ axis; ω_r is the IM angular speed.

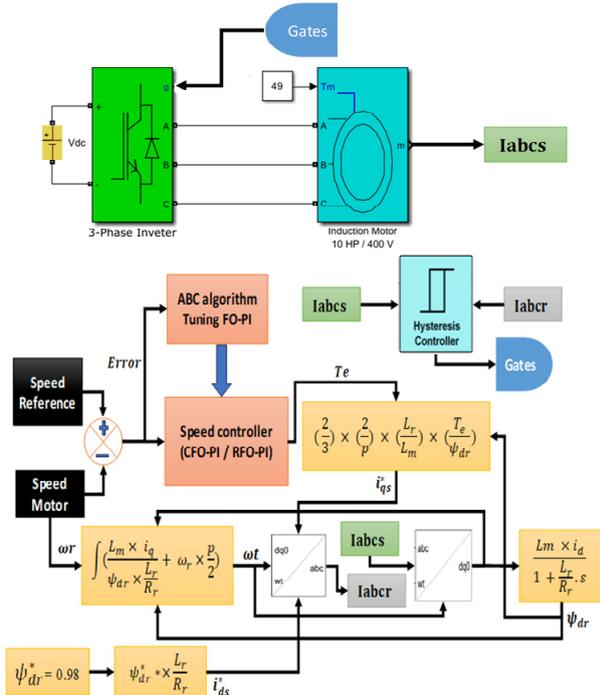


Fig. 1. The control architecture of IFOC of IM

Types of FOPI controllers. FOPI controllers are extensively utilized in various control projects to attain accurate system efficiency [19]. The bulk of the controllers possess real and complex components with fractional order integrals [20].

The general CFOPI controller is represented as [21, 22]:

$$G_c(s) = K_p + K_i \cdot \left(\frac{1}{s}\right)^{\alpha+j\beta}, \quad (1)$$

where K_p is the proportional value; K_i is the integral value; α , β are the non integer number (fractional values); s is the fractional operator.

The complex integrator can be written as:

$$\left(\frac{1}{s}\right)^{\alpha+j\beta} = \left(\frac{1}{s}\right)^{\alpha} \cdot \left(\frac{1}{s}\right)^{j\beta}; \quad (2)$$

$$\left(\frac{1}{s}\right)^{\alpha+j\beta} = \left(\frac{1}{s}\right)^{\alpha} \cdot e^{j\beta \ln\left(\frac{1}{s}\right)}; \quad (3)$$

$$\left(\frac{1}{s}\right)^{\alpha+j\beta} = \left(\frac{1}{s}\right)^{\alpha} \cdot \left(\cos\left(\beta \ln\left(\frac{1}{s}\right)\right) + j \sin\left(\beta \ln\left(\frac{1}{s}\right)\right) \right). \quad (4)$$

If the complex operator is applied to a real input it will result in a complex response. So, in practice, it is realized by extracting the real part. The transfer function of CFOPI controller denoted as [23]:

$$\left(\frac{1}{s}\right)^{\alpha+j\beta} = \left(\frac{1}{s}\right)^{\alpha} \cdot \cos\left(\beta \ln\left(\frac{1}{s}\right)\right). \quad (5)$$

According to (1), when the real and imaginary parts are fractional values, the transfer function of the fractional controller has a real and imaginary form, as expressed as:

$$CFOPI(s) = K_p + K_i \cdot \left(\frac{1}{s}\right)^{\alpha} \cdot \cos\left(\beta \ln\left(\frac{1}{s}\right)\right). \quad (6)$$

The transfer function of RFOPI controller is:

$$RFOPI(s) = K_p + K_i \cdot \left(\frac{1}{s}\right)^{\alpha}. \quad (7)$$

According to (1), when the imaginary component is null, the transfer function of the fractional controller has a real style, as articulated in the subsequent equation:

ABC algorithm is engineered to mimic the actions of wild bees to get best solutions for constrained scenarios. The core ABC algorithm comprises 3 categories of bees: worker bees, spectator bees and spy bees. 50 % of the swarm consists of hired bees, while the other 50 % consists of observation bees. Just one artificial hired bee is supposed to exist for each food source [24]. The quantity of worker bees in the group correlates with the food sources in proximity to the hive. Foraging bees access their food supply and thereafter return to the hive to perform a dance in this area. The employed bee that has forsaken its food reserve metamorphoses into a scout and starts the search for a fresh source of food. Scouts methodically investigate their environment to identify a novel food source, driven by personal motivation, environmental indicators, or serendipity. Onlooker bees stay within the hive and assess which kind of food to utilize depending on the knowledge supplied by forager bees [25]. Table 1 explains the parameters of ABC algorithm.

Table 1

Selection of the settings for the ABC algorithm

| Parameters | Values |
|---|--|
| No. of bees and limit | 15 and 30 |
| No. of food sources | Round (no. of bees/2) |
| Population size and iteration number | 15 and 15 |
| Range of K_p and K_i | $0 \leq K_p \leq 200$ and $0 \leq K_i \leq 200$ |
| Range of real and imaginary part of CFO-PI controller | $0 \leq \alpha \leq 1$ and $0 \leq \beta \leq 1$ |

Driving cycle for Mosul City (Iraq). Definition of a driving cycle collection of data points illustrating vehicle speed in relation to time. Several driving cycles are employed globally for homologation, including the FTP-75 in the USA, the NEDC in Europe, and the J10-15 in Japan [26]. These cycles frequently encompass additional sub phases designed to illustrate low and high speed sequences or various driving environments such as urban, rural or freeway settings [27]. The proposed driving model was used to test the best type of fractional PI controllers and find the most efficient controller for tracking the required speeds of Mosul City's driving cycle. The proposed driving cycle includes reversing the electric vehicle's speed. The characteristics of the Mosul driving cycle the test duration is 12 min (Fig. 2). The load of 7.46 kW is kept constant during the driving cycle's execution and consists of the following durations as detailed in Table 2.

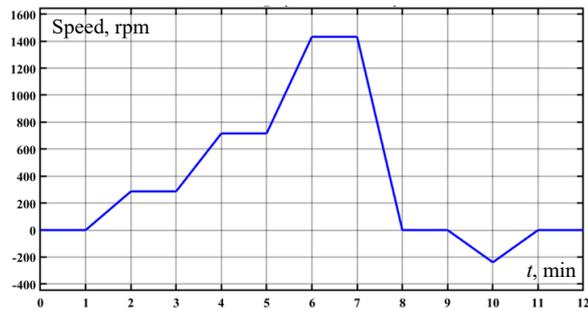


Fig. 2. Mosul City driving cycle

Table 2
Clarify the features of the driving cycle test for a control system in an electric vehicle

| Duration, min | Speed case, rpm | Duration, min | Speed case, rpm |
|---------------|---------------------------|---------------|--|
| [0–1] | Turn off speed | [7–8] | Decrease speed (braking mode) [1432–0] |
| [1–2] | Increase speed [0–286] | [8–9] | Turn off speed |
| [2–3] | Constant at 286 | [9–10] | Reverse speed direction [0–238] |
| [3–4] | Increase speed [286–716] | [10–11] | Decrease speed [238–0] |
| [4–5] | Constant at 716 | [11–12] | Turn off speed |
| [5–6] | Increase speed [716–1432] | | |
| [6–7] | Constant at 1432 | | |

Simulation and results. This section shows the simulation method for controlling the speed of an electric vehicle using a three-phase IM, which parameters are shown in Table 3.

Table 3

| Parameters of the IM | |
|------------------------------------|----------|
| Parameters | Value |
| Rated power P , HP | 10 |
| Voltage V , V | 400 |
| Frequency f , Hz | 50 |
| Angular speed ω_r , rpm | 1440 |
| Stator resistance R_s , Ω | 0.7384 |
| Stator self-inductance L_s , mH | 3.045 |
| Rotor resistance R_r , Ω | 0.7402 |
| Rotor self-inductance L_r , mH | 3.045 |
| Magnetizing inductance L_m , H | 0.1241 |
| Inertia J , kg·m ² | 0.0343 |
| Friction factor F , N·m·s | 0.000503 |
| Number of pole pairs p | 2 |

It implements an IFOC technique with the proposed FOPI controller types. For an electric vehicle was developed to examine the different kinds of FOPI controllers by using performance Integral Time Absolute Error (ITAE) index:

$$ITAE = \int_0^t |error(t)| dt. \quad (8)$$

The performance index showed that the CFOPI controller outperformed the RFOPI controller in obtaining the best results in tracking the driving cycle signal with the slightest error. Table 4 shows the parameters of all FOPI types by tuning ABC algorithm and identify the optimal variant, reflecting the characteristics of the roadways in Mosul (Iraq).

Table 4
Tuning the all types of FOPI controller using ABC algorithm

| Controller types | Transfer function | ITAE |
|------------------|--|--------|
| CFOPI | $62.928 + 200 \cdot \left(\frac{1}{s}\right)^{0.982 + j0.587}$ | 2.1004 |
| RFOPI | $59.724 + 198.565 \cdot \left(\frac{1}{s}\right)^{0.9}$ | 2.1538 |

Figure 3 shows the IM characteristics, when Mosul driving cycle is applied to the IM using the CFOPI controller by tuning parameters ABC algorithm.

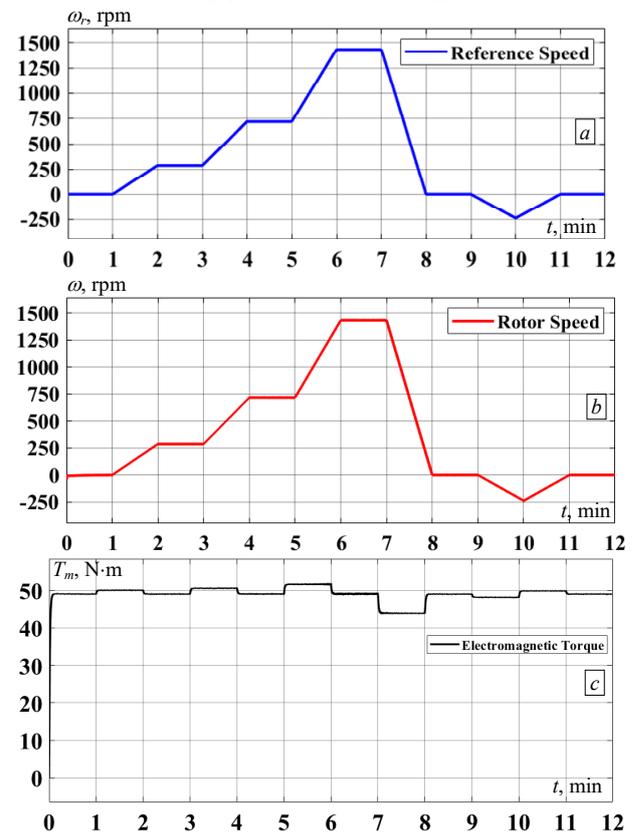


Fig. 3. The driving cycle response of the IM using the CFOPI controller: a – driving cycle reference; b – driving cycle of rotor speed IM; c – electromagnetic torque response

The different kinds of fractional controllers were evaluated using specific reference speeds (for lower-speed and high speed ranges) to facilitate a comparison among controllers. Table 5 indicates that the CFOPI controller surpassed the RFOPI controller, and Fig. 4 illustrates the time response for each reference speed.

Table 5

Comparison of fractional controllers at different reference speeds in terms of the time characteristics of the speed response

| Types of FOPI controller | Speed reference, rpm | Overshoot, % | Peak time, s | Settling time, s | Steady state error, % |
|--------------------------|----------------------|--------------|--------------|------------------|-----------------------|
| RFOPI | 250 | 8 | 0.012 | 0.13 | 0 |
| | 750 | 5.6 | 0.016 | 0.717 | 0 |
| | 1200 | 5.67 | 0.024 | 0.95 | 0 |
| | 1440 | 6.18 | 0.068 | 0.98 | 0 |
| CFOPI | 250 | 7.6 | 0.012 | 0.12 | 0 |
| | 750 | 4 | 0.016 | 0.4 | 0 |
| | 1200 | 3.66 | 0.024 | 0.74 | 0 |
| | 1440 | 3.95 | 0.074 | 0.92 | 0 |

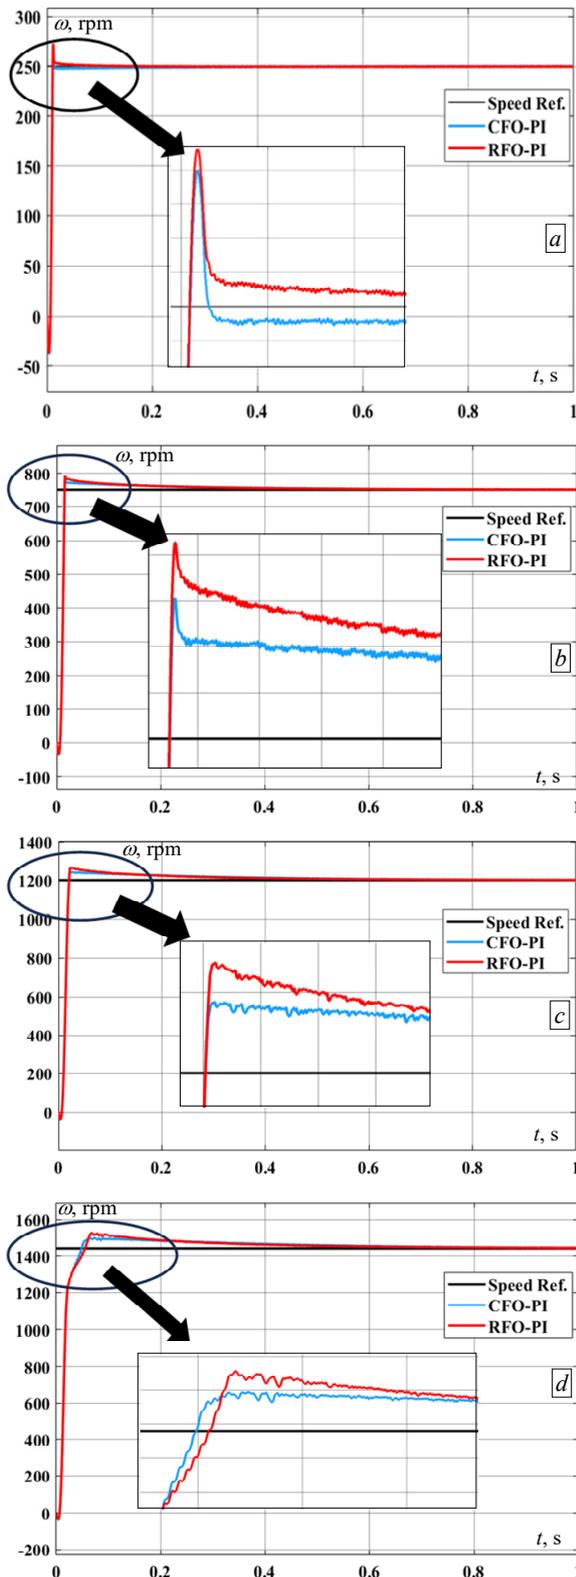


Fig. 4. Speed response of IM by CFOPI and RFOPI controllers for speed references:
 a – 250 rpm; b – 750 rpm; c – 1200 rpm; d – 1440 rpm

Conclusions. IFOC strategy that uses 2 types of fractional controllers was used to control the speed of the three-phase IM via the voltage source inverter circuit, where the firing signal is generated using the hysteresis current method. It is comparative between the proposed controllers using the proposed driving cycle for the city of Mosul (Iraq), which includes several levels of speed

values in both directions. And the other pattern is different reference speed levels, where low and high speeds were chosen in order to cover all cases of speed to using the IM in electric vehicle and using the ABC algorithm to find the parameters of the controllers through the results of the simulation turns out the superiority the CFOPI controller over the RFOPI controller, where the lowest ITAE in tracking the motor speed for driving cycle for the CFOPI controller is 2.1004, for the RFOPI controller is 2.1538.

The superiority of the CFOPI controller over the RFOPI controller where the overshoot in speed the limit that is considered one of the most. Important factor to speed control where the controller was CFOPI (7.6 %) and RFOPI (8 %) for reference speed 250 rpm; at reference speed 750 rpm (4 %) and (5.6 %), for 1200 rpm was (3.66 %) and (5.67 %) and for 1440 rpm was (3.95 %) and (6.18 %) respectively.

Acknowledgements. The authors would like to sincerely thank the College of Engineering Department of Electrical at the University of Mosul for the tremendous help they provided during this work.

Conflict of interest. The authors declare that there is no conflict of interest.

REFERENCES

1. Alitash G.K. Integer PI, fractional PI and fractional PI data trained ANFIS speed controllers for indirect field oriented control of induction motor. *Heliyon*, 2024, vol. 10, no. 18, art. no. e37822. doi: <https://doi.org/10.1016/j.heliyon.2024.e37822>.
2. Nemouchi B., Rezgui S.E., Benalla H., Nebti K. Fractional-based iterative learning-optimal model predictive control of speed induction motor regulation for electric vehicles application. *Electrical Engineering & Electromechanics*, 2024, no. 5, pp. 14-19. doi: <https://doi.org/10.20998/2074-272X.2024.5.02>.
3. Adamczyk M., Orłowska-Kowalska T. Postfault Direct Field-Oriented Control of Induction Motor Drive Using Adaptive Virtual Current Sensor. *IEEE Transactions on Industrial Electronics*, 2022, vol. 69, no. 4, pp. 3418-3427. doi: <https://doi.org/10.1109/TIE.2021.3075863>.
4. Adigintla S., Aware M.V. Robust Fractional Order Speed Controllers for Induction Motor Under Parameter Variations and Low Speed Operating Regions. *IEEE Transactions on Circuits and Systems II: Express Briefs*, 2023, vol. 70, no. 3, pp. 1119-1123. doi: <https://doi.org/10.1109/TCSII.2022.3220526>.
5. Ndiaye A., German R., Bouscayrol A., Gaetani-Liseo M., Venet P., Castex E. Impact of the User Charging Practice on the Battery Aging in an Electric Vehicle. *IEEE Transactions on Vehicular Technology*, 2024, vol. 73, no. 4, pp. 4578-4588. doi: <https://doi.org/10.1109/TVT.2024.3356116>.
6. Adigintla S., Aware M.V., Bingi K., Das S. Novel Complex Fractional Order Speed Controller for IM Drive Under Varying Operating Conditions With Enhanced Robustness. *IEEE Transactions on Industrial Electronics*, 2024, vol. 71, no. 8, pp. 8438-8447. doi: <https://doi.org/10.1109/TIE.2023.3314864>.
7. Alsammak A.N.B., Al-Kaoaz H.N.A. Design of a fuzzy distance relay taking into consideration the impact of using a unified power flow controller. *Eastern-European Journal of Enterprise Technologies*, 2023, vol. 2, no. 5 (122), pp. 6-19. doi: <https://doi.org/10.15587/1729-4061.2023.277343>.
8. Altamura A., Lino P., Maione G., Kapetina M., Rapaic M.R., Jelacic Z.D. On PID Controllers for a Complex-Order Fractional Model of an Automotive Injection System. *IFAC-PapersOnLine*, 2024, vol. 58, no. 12, pp. 119-124. doi: <https://doi.org/10.1016/j.ifacol.2024.08.177>.
9. Alsammak A.N.B., Ghanim A.S. Performance Enhancement and Assessment of the Dual Stator Induction Motor. *Przegląd Elektrotechniczny*, 2023, no. 10, pp. 171-177. doi: <https://doi.org/10.15199/48.2023.10.33>.
10. Blaschke F. The Principle of Field Orientation as Applied to the NEW Transvector Closed-Loop System for Rotating-Field Machines. *Siemens Review*, 1972, vol. 34, no. 3, pp. 217-220.

11. Gomes R.R., Pugliese L.F., Silva W.W.A.G., Sousa C.V., Rezende G.M., Rodor F.F. Speed Control with Indirect Field Orientation for Low Power Three-Phase Induction Machine with Squirrel Cage Rotor. *Machines*, 2021, vol. 9, no. 12, art. no. 320. doi: <https://doi.org/10.3390/machines9120320>.
12. Kumar D.M., Mudaliar H.K., Cirrincione M., Mehta U., Pucci M. Design of a Fractional Order PI (FOPI) for the Speed Control of a High-Performance Electrical Drive with an Induction Motor. *2018 21st International Conference on Electrical Machines and Systems (ICEMS)*, pp. 1198-1202. doi: <https://doi.org/10.23919/ICEMS.2018.8549407>.
13. Raj A., Khan Y.A., Verma V. Comparative Evaluation of PSO, TLBO, and JAYA based Adaptive PI and FOPI Controllers for Vector Controlled Induction Motor Drive. *2021 IEEE 4th International Conference on Computing, Power and Communication Technologies (GUCON)*, pp. 1-6. doi: <https://doi.org/10.1109/GUCON50781.2021.9573705>.
14. Mohammed H.A., Alsammak A.N.B. An Intelligent Hybrid Control System using ANFIS-Optimization for Scalar Control of an Induction Motor. *Journal Européen Des Systèmes Automatisés*, 2023, vol. 56, no. 5, pp. 857-862. doi: <https://doi.org/10.18280/jesa.560516>.
15. Sayed S., Elmenshawy M., Elmenshawy M., Bader Q., Iqbal A. Comparison of Direct Torque Control and Indirect Field-Oriented Control for Three-Phase Induction Machine. *Lecture Notes in Electrical Engineering*, 2021, vol. 723 LNEE, pp. 131-141. doi: https://doi.org/10.1007/978-981-33-4080-0_13.
16. Wang H., Yang Y., Ge X., Zuo Y., Yue Y., Li S. PLL- and FLL-Based Speed Estimation Schemes for Speed-Sensorless Control of Induction Motor Drives: Review and New Attempts. *IEEE Transactions on Power Electronics*, 2022, vol. 37, no. 3, pp. 3334-3356. doi: <https://doi.org/10.1109/TPEL.2021.3117697>.
17. Abed K., Zine H.K.E. Intelligent fuzzy back-stepping observer design based induction motor robust nonlinear sensorless control. *Electrical Engineering & Electromechanics*, 2024, no. 2, pp. 10-15. doi: <https://doi.org/10.20998/2074-272X.2024.2.02>.
18. Ghanim A.S., Alsammak A.N.B. Modelling and simulation of self-excited induction generator driven by a wind turbine. *Eastern-European Journal of Enterprise Technologies*, 2020, vol. 6, no. 8 (108), pp. 6-16. doi: <https://doi.org/10.15587/1729-4061.2020.213246>.
19. Amieur T., Taibi D., Kahla S., Bechouat M., Sedraoui M. Tilt-fractional order proportional integral derivative control for DC motor using particle swarm optimization. *Electrical Engineering & Electromechanics*, 2023, no. 2, pp. 14-19. doi: <https://doi.org/10.20998/2074-272X.2023.2.03>.
20. Wang J., Du C., Yan F., Duan X., Hua M., Xu H., Zhou Q. Energy Management of a Plug-in Hybrid Electric Vehicle Using Bayesian Optimization and Soft Actor-Critic Algorithm. *IEEE Transactions on Transportation Electrification*, 2024, pp. 1-1. doi: <https://doi.org/10.1109/TTE.2024.3398046>.
21. Warriar P., Shah P. Design of an Optimal Fractional Complex Order PID Controller for Buck Converter. *Journal of Robotics and Control (JRC)*, 2023, vol. 4, no. 3, pp. 243-262. doi: <https://doi.org/10.18196/jrc.v4i3.17446>.
22. Warriar P., Shah P. Fractional Order Control of Power Electronic Converters in Industrial Drives and Renewable Energy Systems: A Review. *IEEE Access*, 2021, vol. 9, pp. 58982-59009. doi: <https://doi.org/10.1109/ACCESS.2021.3073033>.
23. Zellouma D., Bekakra Y., Benbouhenni H. Field-oriented control based on parallel proportional-integral controllers of induction motor drive. *Energy Reports*, 2023, vol. 9, pp. 4846-4860. doi: <https://doi.org/10.1016/j.egyr.2023.04.008>.
24. Wang K., Li X., Gao L., Li P., Sutherland J.W. A Discrete Artificial Bee Colony Algorithm for Multiobjective Disassembly Line Balancing of End-of-Life Products. *IEEE Transactions on Cybernetics*, 2022, vol. 52, no. 8, pp. 7415-7426. doi: <https://doi.org/10.1109/TCYB.2020.3042896>.
25. Yao G., Wu Y., Huang X., Ma Q., Du J. Clustering of Typical Wind Power Scenarios Based on K-Means Clustering Algorithm and Improved Artificial Bee Colony Algorithm. *IEEE Access*, 2022, vol. 10, pp. 98752-98760. doi: <https://doi.org/10.1109/ACCESS.2022.3203695>.
26. Wang Z., Song C., Zhang L., Zhao Y., Liu P., Dorrell D.G. A Data-Driven Method for Battery Charging Capacity Abnormality Diagnosis in Electric Vehicle Applications. *IEEE Transactions on Transportation Electrification*, 2022, vol. 8, no. 1, pp. 990-999. doi: <https://doi.org/10.1109/TTE.2021.3117841>.
27. Da Silva D.C., Kefsi L., Sciarretta A. Closed-Form Expression to Estimate the Hydrogen Consumption of a Fuel Cell Hybrid Electric Vehicle. *IEEE Transactions on Vehicular Technology*, 2024, vol. 73, no. 4, pp. 4717-4728. doi: <https://doi.org/10.1109/TVT.2024.3350351>.

Received 01.11.2024

Accepted 06.12.2024

Published 02.01.2025

I.I. Alnaib¹, MSc., Lecturer,
 A.N. Alsammak¹, PhD, Professor,
¹Electrical Engineering Department,
 College of Engineering, University of Mosul, Iraq,
 e-mail: ibrahim-85353@uomosul.edu.iq (Corresponding Author);
 ahmed_alsammak@uomosul.edu.iq

How to cite this article:

Alnaib I.I., Alsammak A.N. Optimization of fractional PI controller parameters for enhanced induction motor speed control via indirect field-oriented control. *Electrical Engineering & Electromechanics*, 2025, no. 1, pp. 3-7. doi: <https://doi.org/10.20998/2074-272X.2025.1.01>